




CADENAS DE CASQUILLO FIJO

DIN - 8164

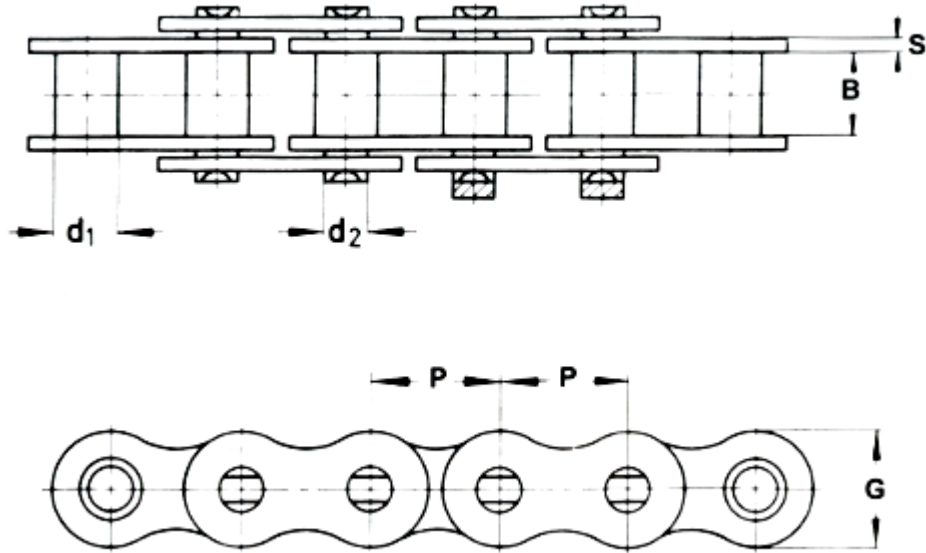

| Ref. | PASO P | Ancho Interior B | Ø Casq. d1 | Ø Eje d2 | MALLAS | | Carga Rotura Kg. |
|-------|-----------|------------------------|------------------|----------------|--------|----|------------------------|
| | | | | | G | S | |
| CF020 | 20 | 16 | 12 | 8 | 19 | 3 | 2500 |
| CF025 | 25 | 18 | 15 | 10 | 24 | 3 | 3150 |
| CF030 | 30 | 20 | 17 | 11 | 28 | 4 | 4000 |
| CF035 | 35 | 22 | 18 | 12 | 30 | 4 | 5000 |
| CF040 | 40 | 25 | 20 | 14 | 35 | 5 | 6300 |
| CF045 | 45 | 30 | 22 | 16 | 40 | 6 | 8000 |
| CF050 | 50 | 35 | 26 | 18 | 44 | 6 | 10000 |
| CF055 | 55 | 45 | 30 | 20 | 48 | 8 | 12500 |
| CF060 | 60 | 50 | 32 | 22 | 54 | 8 | 16000 |
| CF065 | 65 | 55 | 36 | 26 | 60 | 8 | 20000 |
| CF070 | 70 | 65 | 42 | 30 | 66 | 10 | 25000 |