




CADENAS REDLERS

Derivadas de la norma DIN-8165

Serie RED

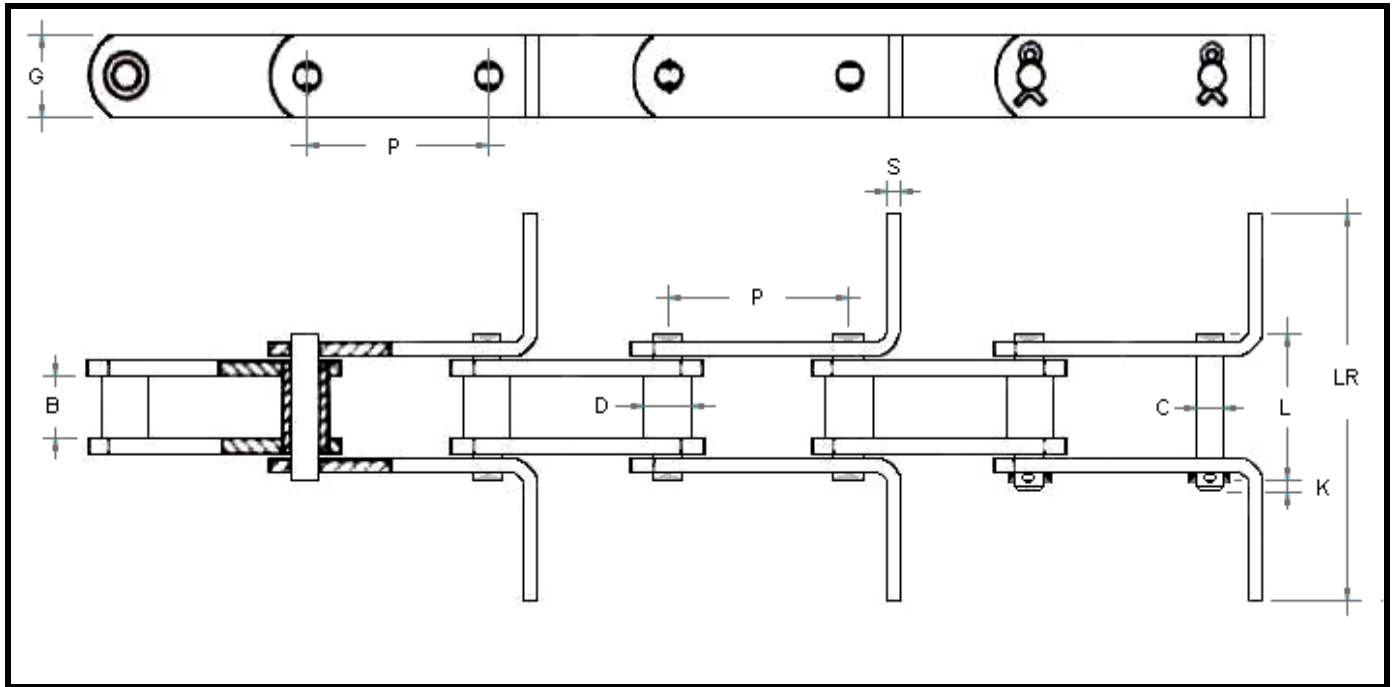

Ref. Cadena	Carga Rotura Kp.	PASO P						CADENAS LISAS Serie RED							
								BRIDAS			ANCHOS		Superficie Articul. cm2		
		Ancho Interior	∅ eje	∅ Casq	Ancho	Grueso	Ancho Scraper								
		B	C	D	G	S	LR	L max	K max						
RED-30	3.000	69	75	80	100	12	10	16	25	3	110	30	9,5	1,80	
RED-56	5.600	75	80	100	125	18	10	15	30	4	120	40	9,5	2,60	
RED-75	7.500	100	125	150	175	20	12	17	35	4	150	43	9,5	3,40	
RED-80	8.000	100	125	150	175	25	13	18	35	4	150	48	11	4,30	
RED-90	9.000	100	125	150	175	25	14	20	35	5	180	52	11	4,90	
RED-100	10.000	100	125	150	175	25	14	20	40	5	180	52	11	4,90	
RED-120	12.000	100	125	150	175	30	16	22	40	6	240	62	13	6,75	
RED-160	16.000	125	150	175	200	35	18	26	50	6	275	68	13	8,45	
RED-270	27.000	125	150	175	200	45	20	30	60	8	380	86	14	12,20	
RED-320	32.000	125	150	175	200	45	22	32	60	10	380	95	17	14,25	
RED-420	42.000	125	150	175	200	48	25	36	70	10	480	99	18	17,00	