




# CADENAS REDLERS

Derivadas de la norma DIN-8167

Serie RM

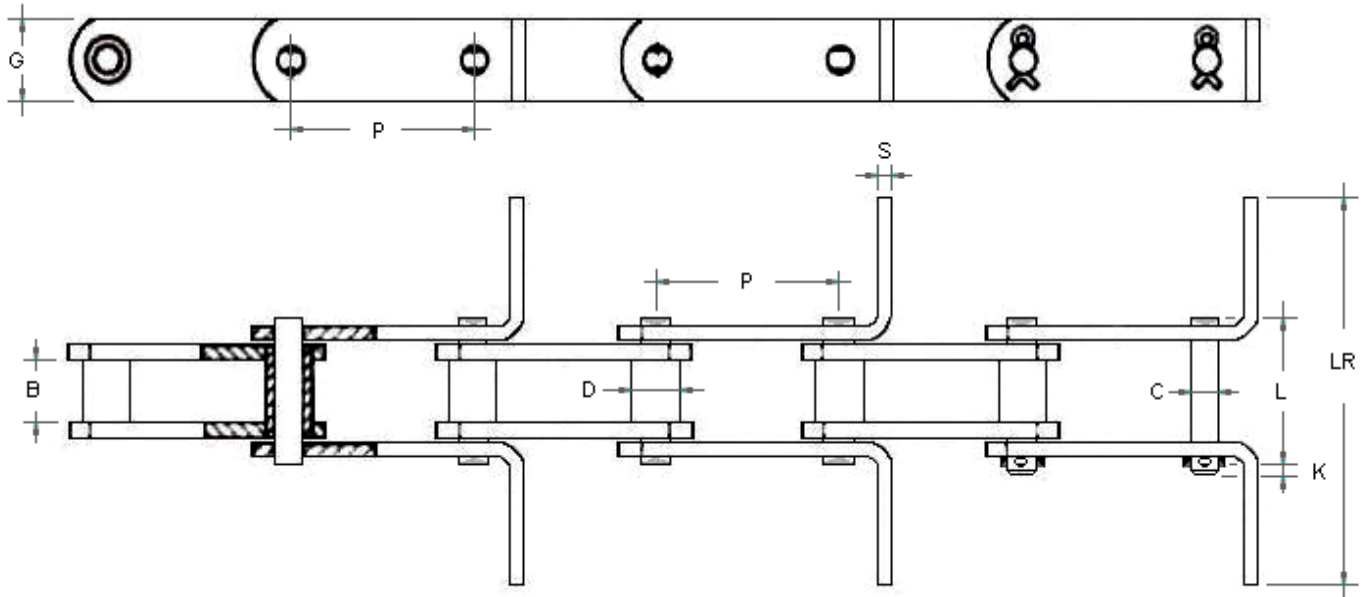

Ref. Cadena	Carga Rotura Kp.	PASO P							CADENAS LISAS Serie RM						
									BRIDAS			ANCHOS		Superficie Articul. cm2	
		Ancho Interior	Ø eje	Ø Casq	Ancho	Grueso	Ancho Scrapper	L	K						
		B	C	D	G	S	LR	L max	K max						
RM-40	4.000	63	80	100	125	160	20	8,5	12,5	25	3,5	200	42	7,5	2,38
RM-56	5.600	80	100	125	160	200	24	10	15	30	4	240	48	9	3,30
RM-80	8.000	100	125	160	200	225	28	12	18	35	5	250	56	10	4,68
RM-112	11.200	100	125	160	200	225	32	15	21	40	6	250	65	11	6,75
RM-160	16.000	100	125	160	200	225	37	18	25	50	7	300	75	12	9,36
RM-224	22.400	125	160	200	250	315	43	21	30	60	8	350	85	13	12,60
RM-315	31.500	160	200	250	315		48	25	36	70	10	400	98	15	17,50