




# CADENAS ROTARY

ISO – 3512

DIN - 8182

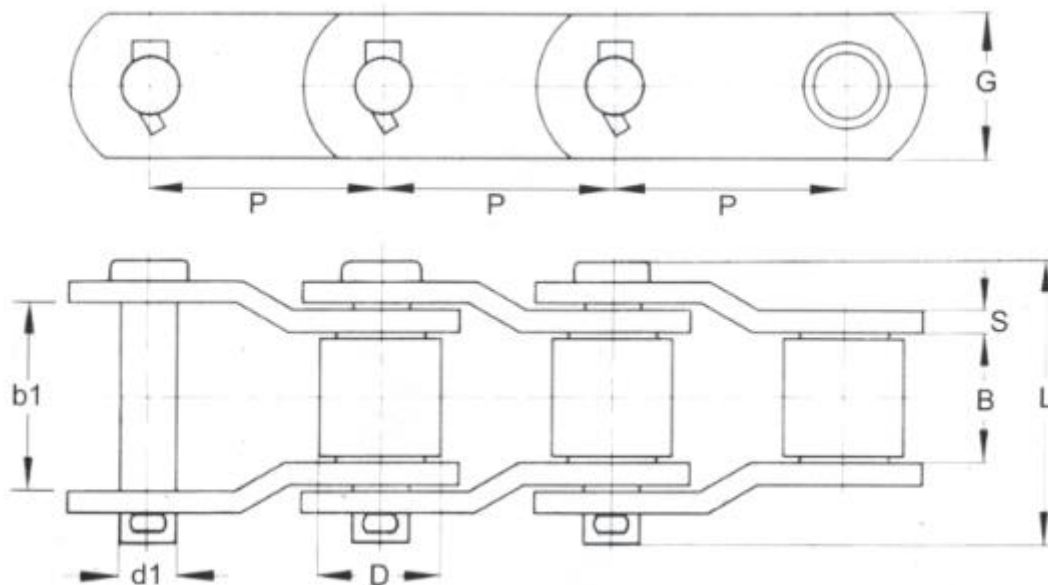

Ref. Cadena ISO	PASO P	Ancho Inter.. B	Ø Rod. D	Ancho Eslabón b1	Mallas		Ø Eje d1	L	Carga De Rotura Kg.	Peso Aprox. Kg/mtr
					G	S				
2010	63,5	38,1	31,75	54,51	47	8	15,9	90,7	27.000	13
2510	78,1	38,1	31,75	55,4	40	8	16	99	32.000	10
2512	77,9	39,6	41,28	59,26	60	10	19,08	103,4	40.000	19
2814	88,9	38,1	44,45	64,14	60	13,5	22,25	117,6	60.000	26
3214	103,2	49,2	44,45	76,8	55	13	22	123,5	62.000	22
3315	103,45	49,3	45,24	78,41	60	15	23,85	134,9	70.000	28
3618	114,3	52,3	57,15	81,58	75	15	27,97	141,2	86.000	39
4020	127	69,8	63,5	102,51	90	17	31,78	168,1	110.000	52
4824	152,4	76,2	76,2	115,21	100	20	38,13	187,5	160.000	70
5628	177,8	82,6	86,9	122,91	130	22	44,45	215,9	210.000	95