




CADENAS DE RODILLOS PASO LARGO

Serie ISO 1275

DIN - 8181

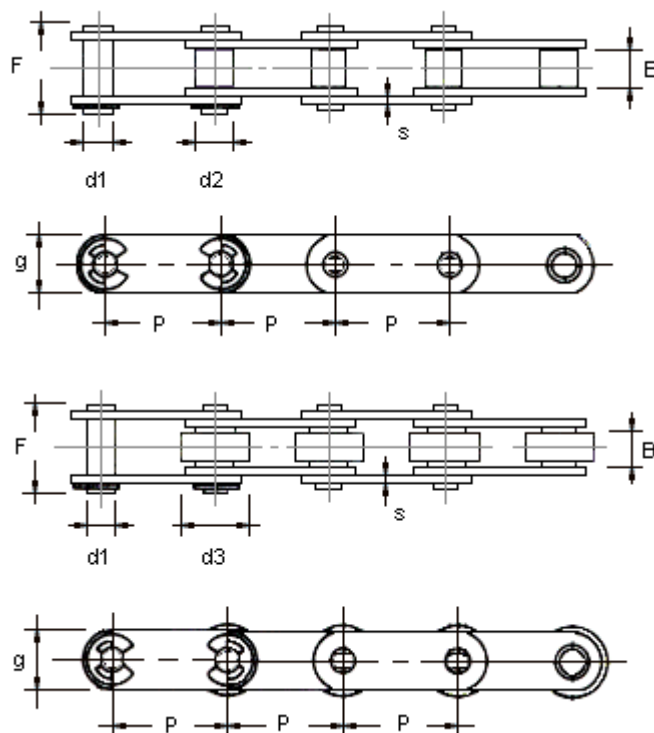

Ref. ISO	Paso P	Ancho Inter. B	Ø Rod. Pequeño d 2	Ø Rod. Grande d 3	Ancho Malla g	Grueso Malla s	Ø Eje d1	Ancho S/ejes F	Superf. Articul. Cm 2	Carga Rotura Kg.
C208-B	25,4	7,75	8,51	15,88	11,8	1,7	4,45	17	0,50	2000
C210-B	31,75	9,65	10,16	19,05	14,7	1,8	5,08	19	0,68	2500
C212-B	38,1	11,68	12,07	22,23	16,1	2	5,72	22	0,90	3200
C216-B	50,8	17,02	15,88	28,58	21,1	4	8,27	34,6	2,12	6500

DERIBADAS DE LAS CADENAS DE RODILLOS DE NORMA AMERICANA (ANSI)

Referencia		Paso P	Ancho Inter. B	Ø Rod. Pequeño d 2	Ø Rod. Grande d 3	Ancho Malla g	Grueso Malla s	Ø Eje D1	Ancho S/ejes F	Superf. Articul. Cm 2	Carga Rotura Kg.
ISO	ANSI										
C208-A	C2040	25,4	7,95	7,92	15,88	12,1	1,6	3,96	16,3	0,45	1850
C210-A	C2050	31,75	9,53	10,16	19,05	15,1	2	5,08	20,5	0,71	2900
C212-A	C2060	38,1	12,70	11,91	22,23	18,1	3,2	5,94	25,1	0,97	3900
C216-A	C2080	50,8	15,88	15,88	28,58	24,1	4	7,92	32,1	1,76	6700